



# Tomorrow's marking technology...today!

## Handy Andy

This complete bench top dot-peen marking system is the **most economical** marker in its class. It is now available with a third axis as an option for marking the OD of round parts, and is great for low volume applications where flexibility is required (<250 parts per day).

- System is available with pneumatic or electric dot-peen
- X-Y motion or with 3rd axis rotator to mark the OD of round parts
- Connects to USB on PC, software and cable are included
- Optional table top stand offers easy set-up




### PC Software Included:

- PC required (not supplied)
- Simple icons
- Easy visual layout of mark
- Radial marks
- Automatic serialization
- Automatic date coding
- Build logos – with internal basic shapes
- Import logos
- Works with Windows



Optional Stand: Billet aluminum T-slot table 12" x 15" (305 x 380mm), includes heavy duty column with manual adjustment for parts up to 12 5/16" (310mm)

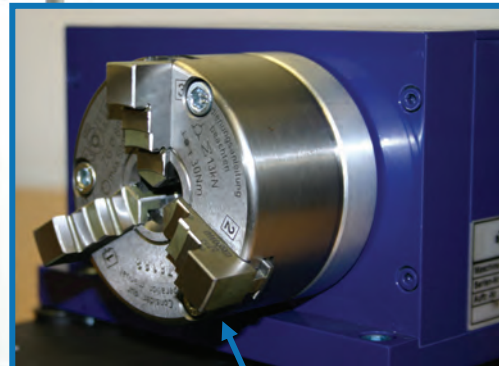

Optional Rotator: To mark the OD of round parts. Chuck load up to 4 lbs, and maximum OD up to 3.14" (80mm).



## Handy Andy

### Handy Andy How to Order

**To Order:** Select only the symbols that represent the marker feature that is needed. Place that symbol in the sequence as shown.

| Model/Feature | Symbol    | Example       |
|---------------|-----------|---------------|
| Handy Andy    | HandyAndy | HandyAndy-E-R |
| Air           | -         |               |
| Electric      | E         |               |
| Std. X-Y Axis | -         |               |
| With Rotator  | R         |               |

| Optional Component |                |
|--------------------|----------------|
| Stand              | HandyAndyStand |

### Features:

- 3.15" x 1.97" (50 x 80mm) marking window
- 3-4 (1/8", 3mm) characters per second
- USB interface (cable included 3', .9m length)
- Carbide pin included - Marks plastic, wood and metals (up to 45 RC)
- Rotator parameters: Chuck load up to 4 lbs (1.8 kg), and maximum OD up to 3.14" (80mm)


### Utilities:

- Electrical components require 110 VAC power,
  - 6 ft (1.8m) electrical cord supplied
- Air power required for pneumatic dot-peen pin\*
  - 1/4 NPT fitting requires connection to air supply
  - Pressure/depth control through supplied regulator (30-75 PSI operating range)

\*This feature is not included with electrically powered pin



Part marked with an air powered pin

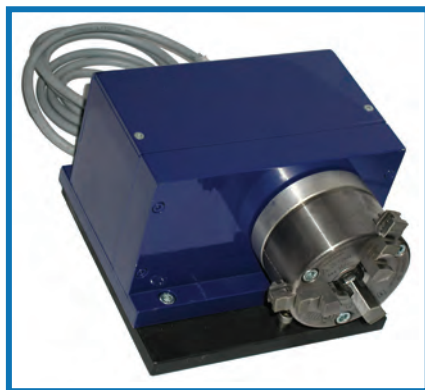

Handy Andy Rotator

### Illustration of Handy Andy

Envelope dimensions:  
21" high x 15" wide x 15" long  
(520 x 380 x 380mm)

Maximum clearance:  
10.75" (275mm)  
Maximum Max Inset:  
6" (150mm)

Marking window:  
1.97" x 3.15"  
(50 x 80mm)

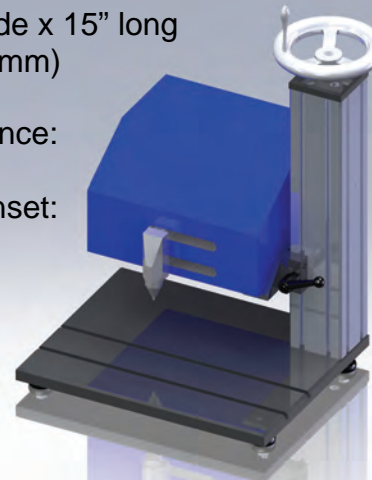


Table Size: 12" x 15" (310 x 380mm)

Complete detailed drawings available for download at [www.marking-machines.net](http://www.marking-machines.net)