

## Model 300 I-Mark Controller: Dual Marking Heads


**Expanded controller** offers options including motion, axes or **dual machine controls**. All the functionality of the I-Mark controller including the selection of communications options and the advanced networking capabilities.



- All the same features as the Model 200 controller.
- Larger Nema 4 industrial enclosure to incorporate 2 complete machine operational interfaces

### **25% Cost savings:**

immediate cost savings of 25% of two units plus installation and maintenance savings.

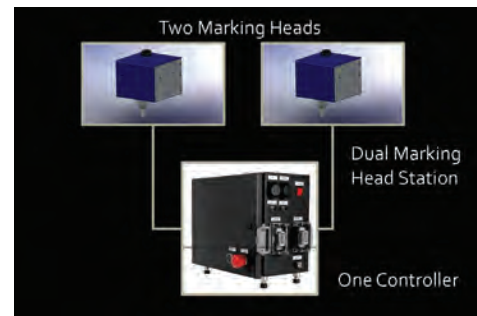

### Model 300 Controller How-to-Order

To Order: Select only the symbols that represent the marker feature that is needed. Place that symbol in the sequence as shown.		
Model/Feature	Symbol	Example
I-Mark Model 300	IM300	IM300-IM-ID60
Basic integration (std)	-	
<b>Operator Station upgrade</b>		
Basic Screen	OS	
Touchscreen	OT	
I Series Number(s)	#####	

### Utilities:

- Electrical components require 110 VAC power, 6 ft (1.8m) electrical cord supplied



### Options:

- Basic integration model as shown is designed to control (4) axis or 2 complete marking heads
- Operator Interface
  - 17" (430mm) screen with Keyboard
  - Touchscreen with Keyboard backup
- I/O included with all options
- Ethernet for programming
- Communication options
  - Modbus (std)
  - Serial (RS232)
  - Ethernet IP